


**MANUFACTURERS & EXPORTERS
INSTITUTIONAL & INDUSTRIAL
TROLLEY WHEELS,
CASTORS & TROLLEYS**

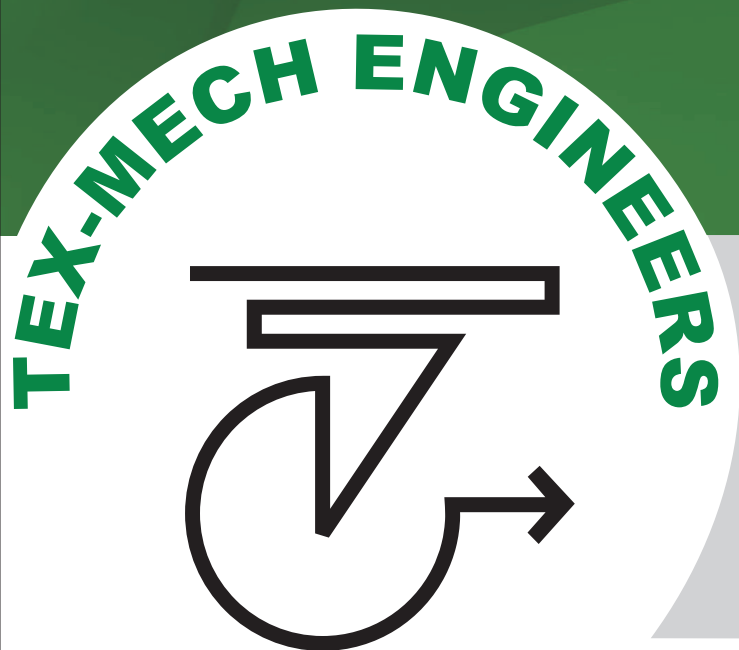


INDIA

**TEX MECH
ENGINEERS**

Mobility Solutions

AN ISO 9001:2008 Certified Company

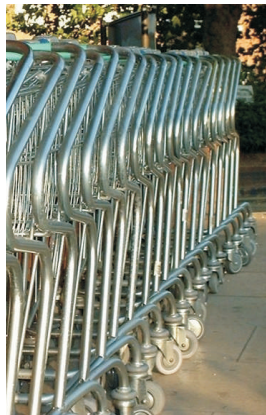

Mobility Solutions



TEX MECH ENGINEERS, a partnership firm established in the year 1970, has been in the business of manufacturing & exporting Institutional & Industrial Trolley wheels, Castors & Trolleys having its manufacturing facility in Mumbai & in Goa, INDIA.

From humble beginnings we have emerged as one of the top manufacturing companies in our segment. This has been achieved through continuous research in product design, adherence to quality & our total commitment to business ethics. The tireless efforts of our dedicated workers have gained us a reputation of reliability in meeting tight delivery schedules & deadlines.

Our vast product range comprises of durable, aesthetically designed, Medium-Heavy-Extra Heavy Duty castors in both stainless steel & mild steel & a variety of wheels in sizes from 50mm dia to 250mm dia, generally designed & manufactured for loading capacities from 100 lbs to 5000 lbs on a set of 4 casters.

Customized castors to suit your operational needs & mounting specifications can be manufactured on knowing:

- 1) Loading
- 2) Application
- 3) Top fixture
- 4) Height
- 5) Quantity

We are willing to cater to small quantity orders of 50-500 nos. Lately we have expanded our manufacturing capacity by setting up another unit at Vasai (Near Mumbai) with a production area of 5000 sq feet.

The following sections will provide you with all technical specifications & photographic representations of our Range of products.

We look forward to your valued enquiries & support.

Warm regards,

Rommel Lalwani
(International Marketing & Projects)
TEX MECH ENGINEERS
Mumbai, INDIA.

Anti Static/ Electric Conductive Polyurethane wheels (Aluminum insert)
with Stainless Steel 304 quality Castors ([PLATE TYPE CASTORS](#))

Anti Static/ Electric Conductive Polyurethane wheels (Aluminum insert)
with Stainless Steel 304 quality Castors ([SOLID SS PIN/STUD TYPE CASTORS](#))

Anti Static/ Electric Conductive Polyurethane wheels (Aluminum insert)
with Stainless Steel 304 quality Castors ([SS THREADED STEM TYPE CASTORS](#))

Polyurethane wheels (Nylon Insert) with Stainless Steel 304
quality Castors ([PLATE TYPE CASTORS](#))

Polyurethane wheels (Nylon Insert) with Stainless Steel 304
quality Castors ([SOLID SS PIN/STUD TYPE CASTORS](#))

Polyurethane wheels (Nylon Insert) with Stainless Steel 304
quality Castors ([SS THREADED STEM TYPE CASTORS](#))

SOLID Virgin White Nylon/ UHMW wheel with Stainless Steel 304
quality Castors ([PLATE TYPE CASTORS](#))

SOLID Virgin White Nylon/ UHMW wheel with Stainless Steel 304
quality Castors ([SOLID SS PIN/STUD TYPE CASTORS](#))

SOLID Virgin White Nylon/ UHMW wheel with Stainless Steel 304
quality Castors ([SS THREADED STEM TYPE CASTORS](#))

Natural Rubber wheels (Nylon Insert) with Stainless Steel 304
quality Castors ([PLATE TYPE CASTORS](#))

Natural Rubber wheels (Nylon Insert) with Stainless Steel 304
quality Castors ([SOLID SS PIN/STUD TYPE CASTORS](#))

Natural Rubber wheels (Nylon Insert) with Stainless Steel 304
quality Castors ([SS THREADED STEM TYPE CASTORS](#))

SOLID Autoclave Able SYNOFLEX wheel with Stainless Steel 316
quality Castors ([PLATE TYPE CASTORS](#))

SOLID Stainless Steel wheel with Stainless Steel 304
quality Castors ([PLATE TYPE CASTORS](#))

Special Medical Series castor with thermoplastic
Rubber Wheel ([SOLID PIN AND THREADED STEM TYPE CASTORS](#))

Twin Wheel Turn Table Assembly


Polyurethane load wheels (rollers) for Pallet Trucks(with Aluminum and cast iron inserts)

Anti Vibration Mounts / Adjusting Glides / Leveling Feet in
stainless steel & Carbon Steel (Chrome Plated) with Polyurethane base


Anti Vibration Mounts / Adjusting Glides / Leveling Feet in
stainless steel & Carbon Steel (Zinc Plated) with Polyurethane base

PRODUCT LIST

SWIVEL CASTOR




FIXED CASTOR




HOW TO READ CASTOR CODES ?

Castor Codes


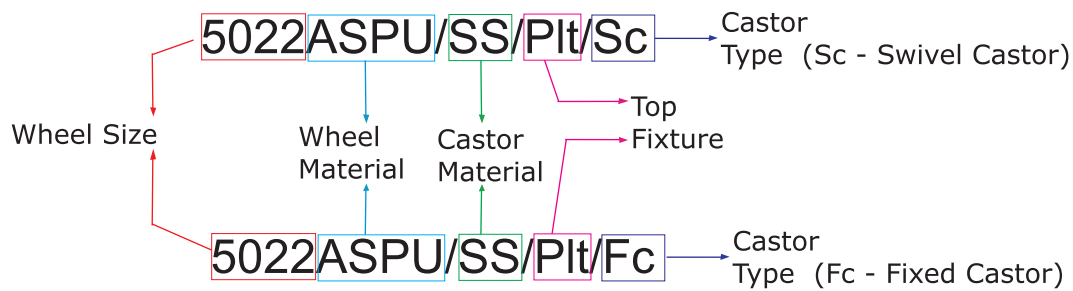


BRAKE OPTIONS

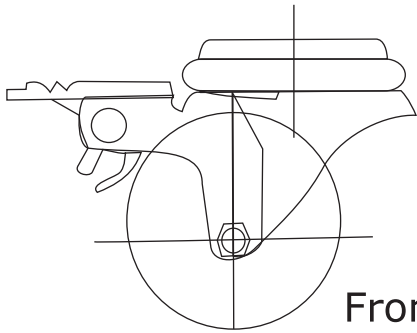


Front Brake


WHEELS




TOP FIXTURES AVAILABLE



PIN





PLATE




THREADED

WHEEL MATERIAL AVAILABLE

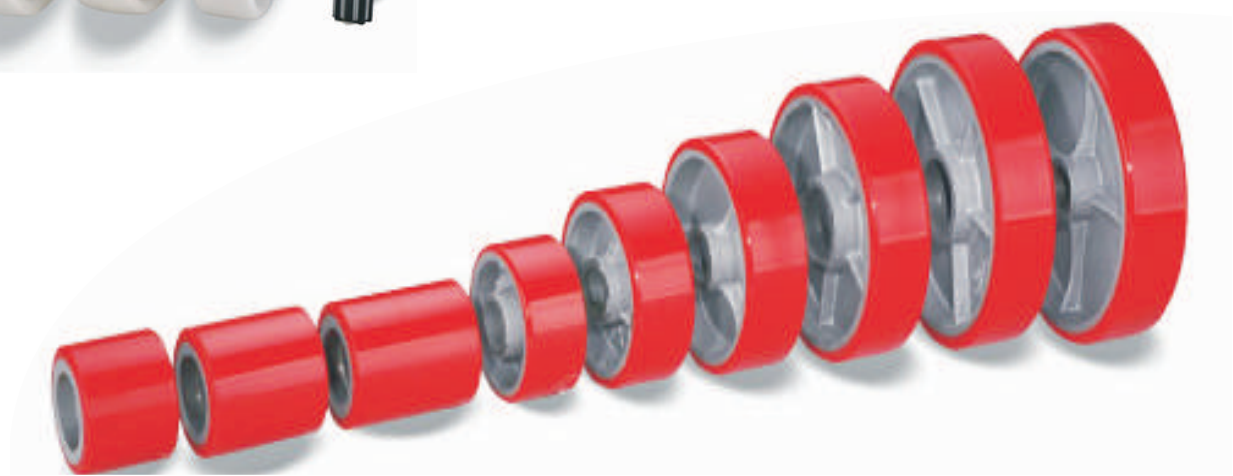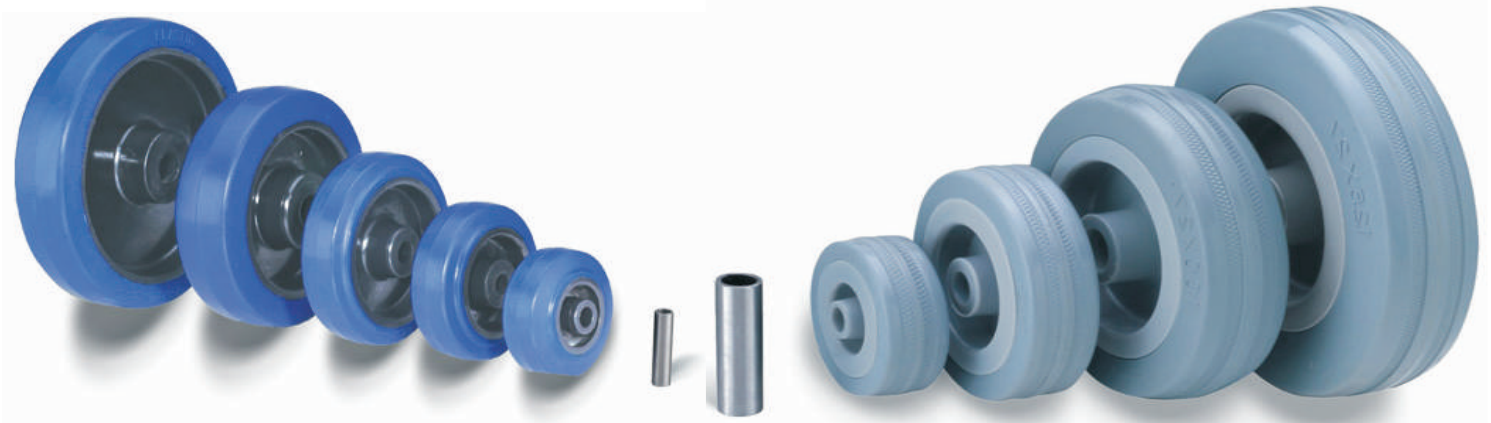

Anti Static/ Electric Conductive Polyurethane wheels (Aluminum insert) with Stainless Steel 304 quality Castors (PLATE TYPE CASTORS)

- ➔ Designed for use in ESD (Electro Static Discharge) environments as a part of a effective ESD Control Program.
- ➔ Suited for Epoxy floors with Anti Static Properties, non marking. Tread of 95 Shore "A" Hardness.
- ➔ Color Availability: Dark Blue / Dark Grey.
- ➔ Loading Capacities mentioned above as considering "Safe Working Loads".

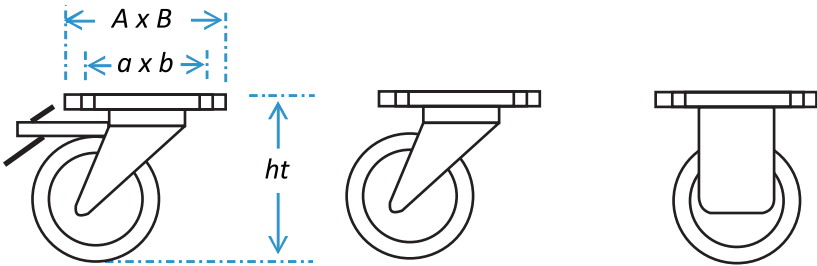

All sizes mentioned are in "mm" (millimeters)
We can manufacture Castors as per your Dimensional needs & Mounting specifications

SINGLE WHEEL CASTOR




Wheel Size OD x W x ID	Bearing	Load per Wheel / Castor	Plate Size A x B	Hole Dist a x b	Height ht	Swivel Castor with Brake	Swivel Castor	Fixed Castor
50 x 22 x 6	Bush	20 kgs	75 x 55	50 x 30	85	5022ASPU/SS/Plt/Sc/Br	5022ASPU/SS/Plt/Sc	5022ASPU/SS/Plt/Fc
63 x 22 x 6	Bush	25 kgs	75 x 65	60 x 50	95	6322ASPU/SS/Plt/Sc/Br	6322ASPU/SS/Plt/Sc	6322ASPU/SS/Plt/Fc
75 x 32 x 10	Ball Bearing	40 kgs	75 x 75	60 x 60	105	7532ASPU/SS/Plt/Sc/Br	7532ASPU/SS/Plt/Sc	7532ASPU/SS/Plt/Fc
100 x 35 x 10	Ball Bearing	70 kgs	75 x 75	60 x 60	135	10035ASPU/SS/Plt/Sc/Br	10035ASPU/SS/Plt/Sc	10035ASPU/SS/Plt/Fc
100 x 50 x 13	Ball Bearing	100 kgs	100 x 100	76 X 76	135	10050ASPU/SS/Plt/Sc/Br	10050ASPU/SS/Plt/Sc	10050ASPU/SS/Plt/Fc
125 x 50 x 13	Ball Bearing	125 kgs	100 x 100	76 X 76	155	12550ASPU/SS/Plt/Sc/Br	12550ASPU/SS/Plt/Sc	12550ASPU/SS/Plt/Fc
150 x 50 x 13	Ball Bearing	150 kgs	125 x 100	100 X 75	190	15050ASPU/SS/Plt/Sc/Br	15050ASPU/SS/Plt/Sc	15050ASPU/SS/Plt/Fc
200 x 50 x 13	Ball Bearing	175 kgs	125 x 100	100 X 75	240	20050ASPU/SS/Plt/Sc/Br	20050ASPU/SS/Plt/Sc	20050ASPU/SS/Plt/Fc

TWIN WHEEL CASTOR

125 x 50 x 13	Ball Bearing	250 kgs	125 x 100	100 X 75	175	12550ASPU/SS/TW/Plt/Sc/Br	12550ASPU/SS/TW/Plt/Sc	12550ASPU/SS/TW/Plt/Fc
150 x 50 x 13	Ball Bearing	300 kgs	125 x 100	100 X 75	200	15050ASPU/SS/TW/Plt/Sc/Br	15050ASPU/SS/TW/Plt/Sc	15050ASPU/SS/TW/Plt/Fc
200 x 50 x 13	Ball Bearing	375 kgs	125 x 100	100 X 75	250	20050ASPU/SS/TW/Plt/Sc/Br	20050ASPU/SS/TW/Plt/Sc	20050ASPU/SS/TW/Plt/Fc
250 x 60 x 13	Ball Bearing	450 kgs	150 x 125	125 X 100	305	25060ASPU/SS/TW/Plt/Sc/Br	25060ASPU/SS/TW/Plt/Sc	25060ASPU/SS/TW/Plt/Fc

Anti Static/ Electric Conductive Polyurethane wheels (Aluminum insert) with Stainless Steel 304 quality Castors (SOLID SS PIN/STUD TYPE CASTORS)

- ➔ Designed for use in ESD (Electro Static Discharge) environments as a part of a effective ESD Control Program.
- ➔ Suited for Epoxy floors with Anti Static Properties, non marking. Tread of 95 Shore "A" Hardness.
- ➔ Color Availability: Dark Blue / Dark Grey.
- ➔ Loading Capacities mentioned above as considering "Safe Working Loads".
- ➔ SOLID SS Pin/ Stud sizes available: 18 x 50, 22 x 50, 25 x 50, 30 x 50, 32 x 50, 32 x 70, 35 x 70.

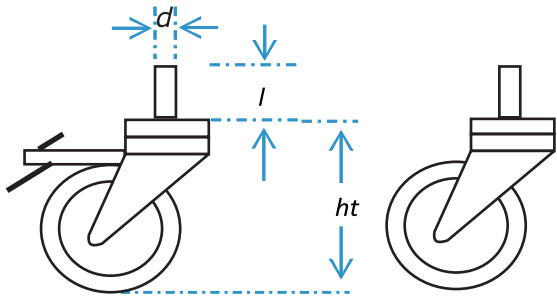

All sizes mentioned are in "mm" (millimeters)
We can manufacture Castors as per your Dimensional needs & Mounting specifications

SINGLE WHEEL CASTOR




Wheel Size OD x W x ID	Bearing	Load per Wheel / Castor	Pin Size d x l	Height ht	Swivel Castor with Brake	Swivel Castor	Fixed Castor
50 x 22 x 6	Bush	20 kgs	18 x 50	85	5022ASPU/SS/P18/Sc/Br	5022ASPU/SS/P18/Sc	5022ASPU/SS/P18/Fc
63 x 22 x 6	Bush	25 kgs	22 x 50	95	6322ASPU/SS/P22/Sc/Br	6322ASPU/SS/P22/Sc	6322ASPU/SS/P22/Fc
75 x 32 x 10	Ball Bearing	40 kgs	22 x 50	105	7532ASPU/SS/P22/Sc/Br	7532ASPU/SS/P22/Sc	7532ASPU/SS/P22/Fc
100 x 35 x 10	Ball Bearing	70 kgs	22 x 50	135	10035ASPU/SS/P22/Sc/Br	10035ASPU/SS/P22/Sc	10035ASPU/SS/P22/Fc
100 x 50 x 13	Ball Bearing	100 kgs	22/32 x 50	135	10050ASPU/SS/P22/Sc/Br	10050ASPU/SS/P22/Sc	10050ASPU/SS/P22/Fc
125 x 50 x 13	Ball Bearing	125 kgs	22/32 x 50	155	12550ASPU/SS/P22/Sc/Br	12550ASPU/SS/P22/Sc	12550ASPU/SS/P22/Fc
150 x 50 x 13	Ball Bearing	150 kgs	22/32 x 50	190	15050ASPU/SS/P32/Sc/Br	15050ASPU/SS/P32/Sc	15050ASPU/SS/P32/Fc
200 x 50 x 13	Ball Bearing	175 kgs	32 x 50	240	20050ASPU/SS/P32/Sc/Br	20050ASPU/SS/P32/Sc	20050ASPU/SS/P32/Fc

TWIN WHEEL CASTOR

125 x 50 x 13	Ball Bearing	250 kgs	32 X 50	175	12550ASPU/SS/TW/P32/Sc/Br	12550ASPU/SS/TW/P32/Sc	12550ASPU/SS/TW/P32/Fc
150 x 50 x 13	Ball Bearing	300 kgs	32 X 50	200	15050ASPU/SS/TW/P32/Sc/Br	15050ASPU/SS/TW/P32/Sc	15050ASPU/SS/TW/P32/Fc
200 x 50 x 13	Ball Bearing	375 kgs	32 X 50	250	20050ASPU/SS/TW/P32/Sc/Br	20050ASPU/SS/TW/P32/Sc	20050ASPU/SS/TW/P32/Fc
250 x 60 x 13	Ball Bearing	450 kgs	35 X 50	305	25060ASPU/SS/TW/P35/Sc/Br	25060ASPU/SS/TW/P35/Sc	25060ASPU/SS/TW/P35/Fc

Anti Static/ Electric Conductive Polyurethane wheels (Aluminum insert) with Stainless Steel 304 quality Castors (SS THREADED STEM TYPE CASTORS)

- ➔ Designed for use in ESD (Electro Static Discharge) environments as a part of a effective ESD Control Program.
- ➔ Suited for Epoxy floors with Anti Static Properties, non marking Tread of 95 Shore "A" Hardness).
- ➔ Color Availability: Dark Blue / Dark Grey.
- ➔ Loading Capacities mentioned above as considering "Safe Working Loads".
- ➔ Threaded stem sizes available: M10 x 50, M12 x 50, M16 x 50, M20 x 50, M24 x 50, M27 x 50.
(Length according to your requirement)

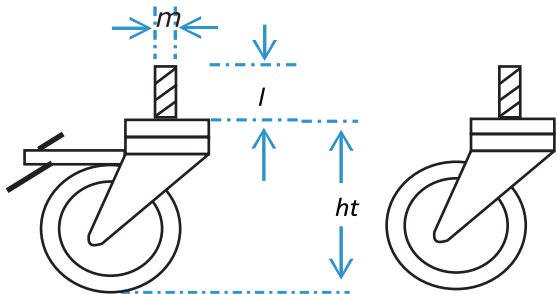


All sizes mentioned are in "mm" (millimeters)
We can manufacture Castors as per your Dimensional needs & Mounting specifications

SINGLE WHEEL CASTOR

Wheel Size OD x W x ID	Bearing	Load per Wheel / Castor	Pin Size <i>m x l</i>	Height ht	Swivel Castor with Brake	Swivel Castor	Fixed Castor
50 x 22 x 6	Bush	15 kgs	M10 x 50	85	5022ASPU/SS/M10/Sc/Br	5022ASPU/SS/M10/Sc	5022ASPU/SS/M10/Fc
63 x 22 x 6	Bush	25 kgs	M10 x 50	95	6322ASPU/SS/M10/Sc/Br	6322ASPU/SS/M10/Sc	6322ASPU/SS/M10/Fc
75 x 32 x 10	Ball Bearing	35 kgs	M10 x 50	105	7532ASPU/SS/M10/Sc/Br	7532ASPU/SS/M10/Sc	7532ASPU/SS/M10/Fc
100 x 35 x 10	Ball Bearing	60 kgs	M12 x 50	135	10035ASPU/SS/M12/Sc/Br	10035ASPU/SS/M12/Sc	10035ASPU/SS/M12/Fc
100 x 50 x 13	Ball Bearing	100 kgs	M16 x 50	135	10050ASPU/SS/M16/Sc/Br	10050ASPU/SS/M16/Sc	10050ASPU/SS/M16/Fc
125 x 50 x 13	Ball Bearing	125 kgs	M20 x 50	155	12550ASPU/SS/M20/Sc/Br	12550ASPU/SS/M20/Sc	12550ASPU/SS/M20/Fc
150 x 50 x 13	Ball Bearing	150 kgs	M24 x 50	190	15050ASPU/SS/M24/Sc/Br	15050ASPU/SS/M24/Sc	15050ASPU/SS/M24/Fc
200 x 50 x 13	Ball Bearing	175 kgs	M24 x 50	240	20050ASPU/SS/M24/Sc/Br	20050ASPU/SS/M24/Sc	20050ASPU/SS/M24/Fc

Polyurethane wheels (Nylon Insert) with Stainless Steel 304 quality Castors (PLATE TYPE CASTORS)

- ➔ Suited for EPOXY FLOORS in Clean Rooms, Pharmaceutical Production Areas, R & D Labs etc
- ➔ Polyurethane tread of 92 Shore "A" Hardness, as per Internationally acceptable norms
- ➔ Color Availability: Red/ Blue/ Brown/ White
- ➔ Loading Capacities mentioned above as considering "Safe Working Loads"

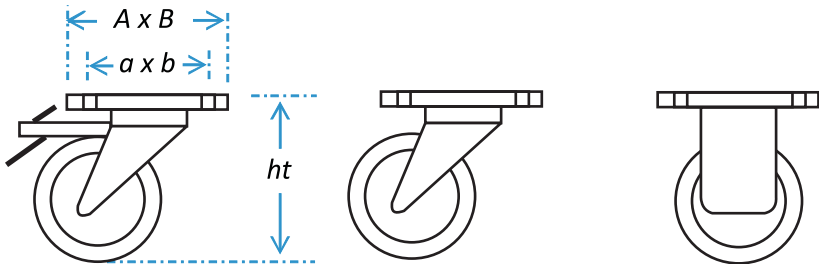

All sizes mentioned are in "mm" (millimeters)
We can manufacture Castors as per your Dimensional needs & Mounting specifications

SINGLE WHEEL CASTOR


Wheel Size OD x W x ID	Bearing	Load per Wheel / Castor	Plate Size A X B	Hole Dist a x b	Height ht	Swivel Castor with Brake	Swivel Castor	Fixed Castor
50 x 22 x 6	Bush	15 kgs	75 x 55	50 x 30	85	5022PU/SS/Plt/Sc/Br	5022PU/SS/Plt/Sc	5022PU/SS/Plt/Fc
50 x 25 x 6	Ball Bearing	20 kgs	75 x 55	50 x 30	85	5025PU/SS/Plt/Sc/Br	5025PU/SS/Plt/Sc	5025PU/SS/Plt/Fc
60 x 24 x 10	Ball Bearing	25 kgs	75 x 65	60 x 50	95	6024PU/SS/Plt/Sc/Br	6024PU/SS/Plt/Sc	6024PU/SS/Plt/Fc
75 x 32 x 10	Ball Bearing	35 kgs	75 x 75	60 x 60	105	7532PU/SS/Plt/Sc/Br	7532PU/SS/Plt/Sc	7532PU/SS/Plt/Fc
75 x 38 x 10	Ball Bearing	70 kgs	100 x 100	76 x 76	105	7538PU/SS/Plt/Sc/Br	7538PU/SS/Plt/Sc	7538PU/SS/Plt/Fc
100 x 32 x 10	Ball Bearing	55 kgs	75 x 75	60 x 60	135	10032PU/SS/Plt/Sc/Br	10032PU/SS/Plt/Sc	10032PU/SS/Plt/Fc
100 x 50 x 13	Roller Bearing	100 kgs	100 x 100	76 x 76	135	10050PU/SS/Plt/Sc/Br	10050PU/SS/Plt/Sc	10050PU/SS/Plt/Fc
125 x 32 x 10	Ball Bearing	65 kgs	100 x 100	76 x 76	155	12532PU/SS/Plt/Sc/Br	12532PU/SS/Plt/Sc	12532PU/SS/Plt/Fc
125 x 50 x 13	Roller Bearing	125 kgs	100 x 100	76 x 76	155	12550PU/SS/Plt/Sc/Br	12550PU/SS/Plt/Sc	12550PU/SS/Plt/Fc
150 x 50 x 13	Roller Bearing	150 kgs	125 x 100	100 x 75	190	15050PU/SS/Plt/Sc/Br	15050PU/SS/Plt/Sc	15050PU/SS/Plt/Fc
200 x 50 x 13	Roller Bearing	175 kgs	125 x 100	100 x 75	240	20050PU/SS/Plt/Sc/Br	20050PU/SS/Plt/Sc	20050PU/SS/Plt/Fc

TWIN WHEEL CASTOR

125 x 50 x 13	Ball Bearing	250 kgs	125 x 100	100 x 75	175	12550PU/SS/TW/Plt/Sc/Br	12550PU/SS/TW/Plt/Sc	12550PU/SS/TW/Plt/Fc
150 x 50 x 13	Ball Bearing	300 kgs	125 x 100	100 x 75	200	15050PU/SS/TW/Plt/Sc/Br	15050PU/SS/TW/Plt/Sc	15050PU/SS/TW/Plt/Fc
200 x 50 x 13	Ball Bearing	375 kgs	125 x 100	100 x 75	250	20050PU/SS/TW/Plt/Sc/Br	20050PU/SS/TW/Plt/Sc	20050PU/SS/TW/Plt/Fc
250 x 60 x 13	Ball Bearing	450 kgs	150 x 125	125 X 100	305	25060PU/SS/TW/Plt/Sc/Br	25060PU/SS/TW/Plt/Sc	25060PU/SS/TW/Plt/Fc

Polyurethane wheels (Nylon Insert) with Stainless Steel 304 quality Castors (SOLID SS PIN/STUD TYPE CASTORS)

- ➔ Suited for EPOXY FLOORS in Clean Rooms, Pharmaceutical Production Areas, R & D Labs etc.
- ➔ Polyurethane tread of 92 Shore "A" Hardness, as per Internationally acceptable norms.
- ➔ Color Availability: Red/ Blue/ Brown/ White.
- ➔ Loading Capacities mentioned above as considering "Safe Working Loads".
- ➔ SOLID SS Pin/ Stud sizes available: 18 x 50, 22 x 50, 25 x 50, 30 x 50, 32 x 50, 32 x 70, 35 x 70.

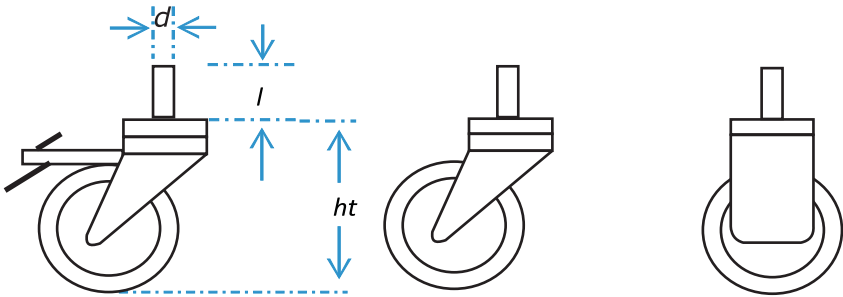

All sizes mentioned are in "mm" (millimeters)
We can manufacture Castors as per your Dimensional needs & Mounting specifications

SINGLE WHEEL CASTOR


Wheel Size OD x W x ID	Bearing	Load per Wheel / Castor	Pin Size d x l	Height ht	Swivel Castor with Brake	Swivel Castor	Fixed Castor
50 x 22 x 6	Bush	15 kgs	18 x 50	85	5022PU/SS/P18/Sc/Br	5022PU/SS/P18/Sc	5022PU/SS/P18/Fc
50 x 25 x 6	Ball Bearing	20 kgs	18 x 50	85	5025PU/SS/P18/Sc/Br	5025PU/SS/P18/Sc	5025PU/SS/P18/Fc
60 x 24 x 10	Ball Bearing	25 kgs	22 x 50	95	6024PU/SS/P22/Sc/Br	6024PU/SS/P22/Sc	6024PU/SS/P22/Fc
75 x 32 x 10	Ball Bearing	35 kgs	22 x 50	105	7532PU/SS/P22/Sc/Br	7532PU/SS/P22/Sc	7532PU/SS/P22/Fc
75 x 38 x 10	Ball Bearing	70 kgs	22 x 50	105	7538PU/SS/P22/Sc/Br	7538PU/SS/P22/Sc	7538PU/SS/P22/Fc
100 x 32 x 10	Ball Bearing	55 kgs	22 x 50	135	10032PU/SS/P22/Sc/Br	10032PU/SS/P22/Sc	10032PU/SS/P22/Fc
100 x 50 x 13	Roller Bearing	100 kgs	22/32 x 50	135	10050PU/SS/P22/Sc/Br	10050PU/SS/P22/Sc	10050PU/SS/P22/Fc
125 x 32 x 10	Ball Bearing	65 kgs	22 x 50	155	12532PU/SS/P22/Sc/Br	12532PU/SS/P22/Sc	12532PU/SS/P22/Fc
125 x 50 x 13	Roller Bearing	125 kgs	22/32 x 50	155	12550PU/SS/P22/Sc/Br	12550PU/SS/P22/Sc	12550PU/SS/P22/Fc
150 x 50 x 13	Roller Bearing	150 kgs	22/32 x 50	190	15050PU/SS/P32/Sc/Br	15050PU/SS/P32/Sc	15050PU/SS/P32/Fc
200 x 50 x 13	Roller Bearing	175 kgs	32 x 50	240	20050PU/SS/P32/Sc/Br	20050PU/SS/P32/Sc	20050PU/SS/P32/Fc

TWIN WHEEL CASTOR

125 x 50 x 13	Roller Bearing	250 kgs	32 X 50	175	12550PU/SS/TW/P32/Sc/Br	12550PU/SS/TW/P32/Sc	12550PU/SS/TW/P32/Fc
150 x 50 x 13	Roller Bearing	300 kgs	32 X 50	200	15050PU/SS/TW/P32/Sc/Br	15050PU/SS/TW/P32/Sc	15050PU/SS/TW/P32/Fc
200 x 50 x 13	Roller Bearing	375 kgs	32 X 50	250	20050PU/SS/TW/P32/Sc/Br	20050PU/SS/TW/P32/Sc	20050PU/SS/TW/P32/Fc
250 x 60 x 13	Ball Bearing	450 kgs	35 X 70	305	25060PU/SS/TW/P35/Sc/Br	25060PU/SS/TW/P35/Sc	25060PU/SS/TW/P35/Fc

Polyurethane wheels (Nylon Insert) with Stainless Steel 304 quality Castors (SS THREADED STEM TYPE CASTORS)

- ➔ Suited for EPOXY FLOORS in Clean Rooms, Pharmaceutical Production Areas, R & D Labs etc.
- ➔ Polyurethane tread of 92 Shore "A" Hardness, as per Internationally acceptable norms.
- ➔ Color Availability: Red/ Blue/ Brown/ White.
- ➔ Loading Capacities mentioned above as considering "Safe Working Loads".
- ➔ Threaded stem sizes available: M10 x 50, M12 x 50, M16 x 50, M20 x 50, M24 x 50, M27 x 50.
(Length according to your requirement)

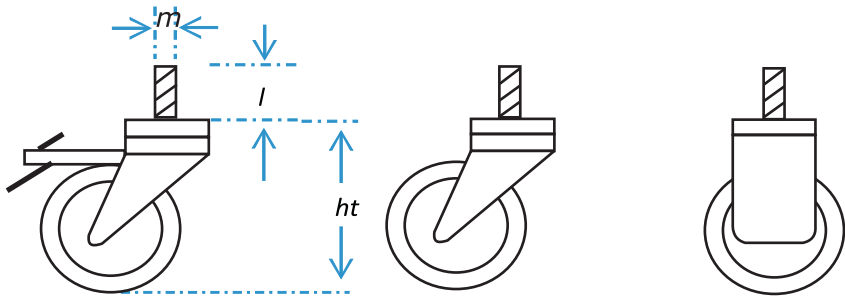

All sizes mentioned are in "mm" (millimeters)
We can manufacture Castors as per your Dimensional needs & Mounting specifications




SINGLE WHEEL CASTOR

Wheel Size OD x W x ID	Bearing	Load per Wheel / Castor	Pin Size <i>m x l</i>	Height ht	Swivel Castor with Brake	Swivel Castor	Fixed Castor
50 x 22 x 6	Bush	10 kgs	M10 x 50	85	5022PU/SS/M10/Sc/Br	5022PU/SS/M10/Sc	5022PU/SS/M10/Fc
50 x 25 x 10	Ball Bearing	15 kgs	M10 x 50	85	5025PU/SS/M10/Sc/Br	5025PU/SS/M10/Sc	5025PU/SS/M10/Fc
60 x 24 x 10	Ball Bearing	20 kgs	M10 x 50	95	6024PU/SS/M10/Sc/Br	6024PU/SS/M10/Sc	6024PU/SS/M10/Fc
75 x 32 x 10	Ball Bearing	30 kgs	M10 x 50	105	7532PU/SS/M10/Sc/Br	7532PU/SS/M10/Sc	7532PU/SS/M10/Fc
100 x 32 x 10	Ball Bearing	50 kgs	M12 x 50	135	10032PU/SS/M12/Sc/Br	10032PU/SS/M12/Sc	10032PU/SS/M12/Fc
100 x 50 x 13	Roller Bearing	80 kgs	M16 x 50	135	10050PU/SS/M16/Sc/Br	10050PU/SS/M16/Sc	10050PU/SS/M16/Fc
125 x 32 x 10	Ball Bearing	60 kgs	M16 x 50	155	12532PU/SS/M16/Sc/Br	12532PU/SS/M16/Sc	12532PU/SS/M16/Fc
125 x 50 x 13	Roller Bearing	100 kgs	M20x 50	155	12550PU/SS/M20/Sc/Br	12550PU/SS/M20/Sc	12550PU/SS/M20/Fc
150 x 50 x 13	Roller Bearing	125 kgs	M24 x 50	190	15050PU/SS/M24/Sc/Br	15050PU/SS/M24/Sc	15050PU/SS/M24/Fc
200 x 50 x 13	Roller Bearing	140 kgs	M24 x 50	240	20050PU/SS/M24/Sc/Br	20050PU/SS/M24/Sc	20050PU/SS/M24/Fc

SOLID Virgin White Nylon/ UHMW wheel with Stainless Steel 304 quality Castors (PLATE TYPE CASTORS)

- ➔ Suited for Kota/ Tiled floors for inter departmental transfers/ packing dept/ passage ways/ non sterile production areas
- ➔ Color Availability: Pure White
- ➔ Loading Capacities mentioned above as considering "Safe Working Loads"

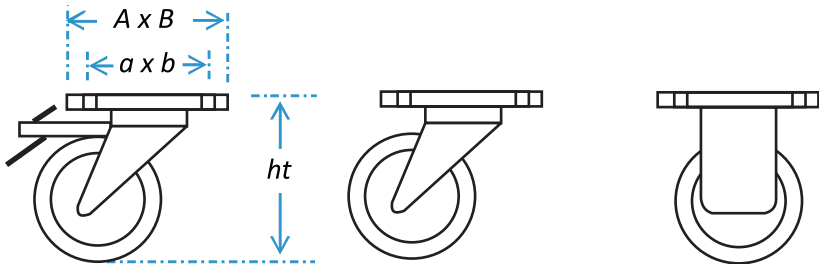

All sizes mentioned are in “mm” (millimeters)
We can manufacture Castors as per your Dimensional needs & Mounting specifications

SINGLE WHEEL CASTOR


Wheel Size OD x W x ID	Bearing	Load per Wheel / Castor	Plate Size A X B	Hole Dist a x b	Height ht	Swivel Castor with Brake	Swivel Castor	Fixed Castor
50 x 22 x 6	Bush	15 kgs	75 x 55	50 x 30	85	5022Ny/SS/Plt/Sc/Br	5022Ny/SS/Plt/Sc	5022Ny/SS/Plt/Fc
75 x 32 x 10	Ball Bearing	35 kgs	75 x 75	60 x 60	105	7532Ny/SS/Plt/Sc/Br	7532Ny/SS/Plt/Sc	7532Ny/SS/Plt/Fc
100 x 34 x 10	Ball Bearing	55 kgs	75 x 75	60 x 60	135	10034Ny/SS/Plt/Sc/Br	10034Ny/SS/Plt/Sc	10034Ny/SS/Plt/Fc
100 x 50 x 13	Ball Bearing	100 kgs	100 x 100	76 x 76	135	10050Ny/SS/Plt/Sc/Br	10050Ny/SS/Plt/Sc	10050Ny/SS/Plt/Fc
125 x 35 x 10	Ball Bearing	65 kgs	100 x 100	76 x 76	155	12535Ny/SS/Plt/Sc/Br	12535Ny/SS/Plt/Sc	12535Ny/SS/Plt/Fc
125 x 50 x 13	Ball Bearing	125 kgs	100 x 100	76 x 76	155	12550Ny/SS/Plt/Sc/Br	12550Ny/SS/Plt/Sc	12550Ny/SS/Plt/Fc
150 x 50 x 13	Ball Bearing	150 kgs	125 x 100	100 x 75	190	15050Ny/SS/Plt/Sc/Br	15050Ny/SS/Plt/Sc	15050Ny/SS/Plt/Fc
200 x 50 x 13	Ball Bearing	175 kgs	125 x 100	100 x 75	240	20050Ny/SS/Plt/Sc/Br	20050Ny/SS/Plt/Sc	20050Ny/SS/Plt/Fc

TWIN WHEEL CASTOR

125 x 50 x 13	Ball Bearing	250 kgs	125 x 100	100 x 75	175	12550Ny/SS/TW/Plt/Sc/Br	12550Ny/SS/TW/Plt/Sc	12550Ny/SS/TW/Plt/Fc
150 x 50 x 13	Ball Bearing	300 kgs	125 x 100	100 x 75	200	15050Ny/SS/TW/Plt/Sc/Br	15050Ny/SS/TW/Plt/Sc	15050Ny/SS/TW/Plt/Fc
200 x 50 x 13	Ball Bearing	375 kgs	125 x 100	100 x 75	250	20050Ny/SS/TW/Plt/Sc/Br	20050Ny/SS/TW/Plt/Sc	20050Ny/SS/TW/Plt/Fc
250 x 60 x 13	Ball Bearing	450 kgs	150 x 125	125 X 100	305	25060Ny/SS/TW/Plt/Sc/Br	25060Ny/SS/TW/Plt/Sc	25060Ny/SS/TW/Plt/Fc

SOLID Virgin White Nylon/ UHMW wheel with Stainless Steel 304 quality Castors (SOLID SS PIN/STUD TYPE CASTORS)

- ➔ Suited for Kota/ Tiled floors for inter departmental transfers/ packing dept/ passage ways/ non sterile production areas
- ➔ Color Availability: Pure White
- ➔ Loading Capacities mentioned above as considering "Safe Working Loads"
- ➔ SOLID SS Pin/ Stud sizes available: 18 x 50, 22 x 50, 25 x 50, 30 x 50, 32 x 50, 32 x 70, 35 x 70

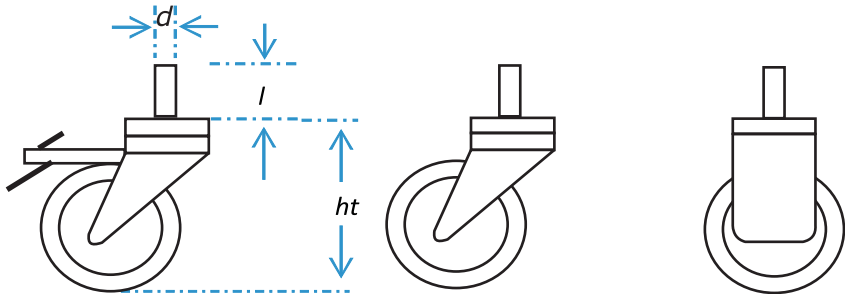

All sizes mentioned are in “mm” (millimeters)
We can manufacture Castors as per your Dimensional needs & Mounting specifications

SINGLE WHEEL CASTOR




Wheel Size OD x W x ID	Bearing	Load per Wheel / Castor	Pin Size <i>d x l</i>	Height ht	Swivel Castor with Brake	Swivel Castor	Fixed Castor
50 x 22 x 6	Bush	15 kgs	18 x 50	85	5022Ny/SS/P18/Sc/Br	5022Ny/SS/P18/Sc	5022Ny/SS/P18/Fc
75 x 32 x 10	Ball Bearing	35 kgs	22 x 50	105	7532Ny/SS/P22/Sc/Br	7532Ny/SS/P22/Sc	7532Ny/SS/P22/Fc
100 x 34 x 10	Ball Bearing	55 kgs	22 x 50	135	10034Ny/SS/P22/Sc/Br	10034Ny/SS/P22/Sc	10034Ny/SS/P22/Fc
100 x 50 x 13	Ball Bearing	100 kgs	22/32 x 50	135	10050Ny/SS/P22/Sc/Br	10050Ny/SS/P22/Sc	10050Ny/SS/P22/Fc
125 x 35 x 10	Ball Bearing	65 kgs	22 x 50	155	12535Ny/SS/P22/Sc/Br	12535Ny/SS/P22/Sc	12535Ny/SS/P22/Fc
125 x 50 x 13	Ball Bearing	125 kgs	22/32 x 50	155	12550Ny/SS/P22/Sc/Br	12550Ny/SS/P22/Sc	12550Ny/SS/P22/Fc
150 x 50 x 13	Ball Bearing	150 kgs	22/32 x 50	190	15050Ny/SS/P32/Sc/Br	15050Ny/SS/P32/Sc	15050Ny/SS/P32/Fc
200 x 50 x 13	Ball Bearing	175 kgs	32 x 50	240	20050Ny/SS/P32/Sc/Br	20050Ny/SS/P32/Sc	20050Ny/SS/P32/Fc

TWIN WHEEL CASTOR

125 x 50 x 13	Ball Bearing	250 kgs	32 X 50	175	12550Ny/SS/TW/P32/Sc/Br	12550Ny/SS/TW/P32/Sc	12550Ny/SS/TW/P32/Fc
150 x 50 x 13	Ball Bearing	300 kgs	32 X 50	200	15050Ny/SS/TW/P32/Sc/Br	15050Ny/SS/TW/P32/Sc	15050Ny/SS/TW/P32/Fc
200 x 50 x 13	Ball Bearing	375 kgs	32 X 50	250	20050Ny/SS/TW/P32/Sc/Br	20050Ny/SS/TW/P32/Sc	20050Ny/SS/TW/P32/Fc
250 x 60 x 13	Ball Bearing	450 kgs	35 X 70	305	25060Ny/SS/TW/P35/Sc/Br	25060Ny/SS/TW/P35/Sc	25060Ny/SS/TW/P35/Fc

SOLID Virgin White Nylon/ UHMW wheel with Stainless Steel 304 quality Castors (SS THREADED STEM TYPE CASTORS)

- ➔ Suited for Kota/ Tiled floors for inter departmental transfers/ packing dept/ passage ways/ non sterile production areas.
- ➔ Color Availability: Pure White.
- ➔ Loading Capacities mentioned above as considering "Safe Working Loads".
- ➔ Threaded stem sizes available: M10 x 50, M12 x 50, M16 x 50, M20 x 50, M24 x 50, M27 x 50.
(Length according to your requirement)

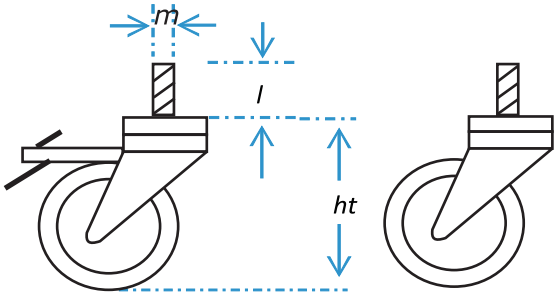


All sizes mentioned are in “mm” (millimeters)
We can manufacture Castors as per your Dimensional needs & Mounting specifications

SINGLE WHEEL CASTOR

Wheel Size OD x W x ID	Bearing	Load per Wheel / Castor	Pin Size <i>m x l</i>	Height ht	Swivel Castor with Brake	Swivel Castor	Fixed Castor
50 x 22 x 6	Bush	10 kgs	M10 x 50	85	5022Ny/SS/M10/Sc/Br	5022Ny/SS/M10/Sc	5022Ny/SS/M10/Fc
75 x 32 x 10	Ball Bearing	30 kgs	M10 x 50	105	7532Ny/SS/M10/Sc/Br	7532Ny/SS/M10/Sc	7532Ny/SS/M10/Fc
100 x 34 x 10	Ball Bearing	50 kgs	M12 x 50	135	10034Ny/SS/M12/Sc/Br	10034Ny/SS/M12/Sc	10034Ny/SS/M12/Fc
100 x 50 x 13	Ball Bearing	80 kgs	M16 x 50	135	10050Ny/SS/M16/Sc/Br	10050Ny/SS/M16/Sc	10050Ny/SS/M16/Fc
125 x 35 x 10	Ball Bearing	60 kgs	M16 x 50	155	12535Ny/SS/M16/Sc/Br	12535Ny/SS/M16/Sc	12535Ny/SS/M16/Fc
125 x 50 x 13	Ball Bearing	100 kgs	M20 x 50	155	12550Ny/SS/M20/Sc/Br	12550Ny/SS/M20/Sc	12550Ny/SS/M20/Fc
150 x 50 x 13	Roller Bearing	125 kgs	M24 x 50	190	15050Ny/SS/M24/Sc/Br	15050Ny/SS/M24/Sc	15050Ny/SS/M24/Fc
200 x 50 x 13	Ball Bearing	140 kgs	M24 x 50	240	20050Ny/SS/M24/Sc/Br	20050Ny/SS/M24/Sc	20050Ny/SS/M24/Fc

Natural Rubber wheels (Nylon Insert) with Stainless Steel 304 quality Castors (PLATE TYPE CASTORS)

- ➔ Suited for Kota/ Tiled floors for inter departmental transfers/ packing dept/ passage ways/ non sterile production areas.
- ➔ Color Availability: Light Grey.
- ➔ Loading Capacities mentioned above as considering "Safe Working Loads".
- ➔ Top Plates can be manufactured as per your requirements.

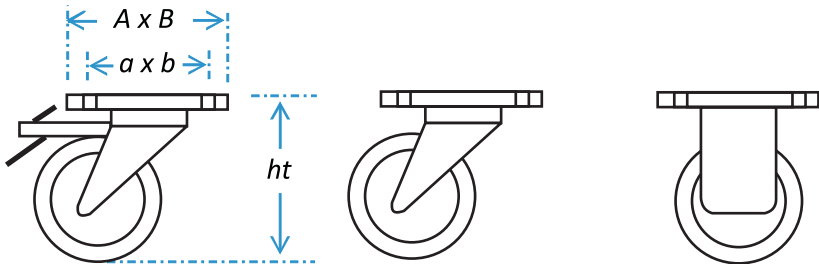




All sizes mentioned are in “mm” (millimeters)
We can manufacture Castors as per your Dimensional needs & Mounting specifications

SINGLE WHEEL CASTOR

Wheel Size OD x W x ID	Bearing	Load per Wheel / Castor	Plate Size A x B	Hole Dist a x b	Height ht	Swivel Castor with Brake	Swivel Castor	Fixed Castor
80 x 30 x 10	Roller Bearing	30 kgs	75 X 75	60 X 60	110	8030RB/SS/Plt/Sc/Br	8030RB/SS/Plt/Sc	8030RB/SS/Plt/Fc
100 x 30 x 10	Roller Bearing	50 kgs	75 X 75	60 X 60	135	10030RB/SS/Plt/Sc/Br	10030RB/SS/Plt/Sc	10030RB/SS/Plt/Fc
125 x 38 x 13	Roller Bearing	60 kgs	100 X 75	80 x 55	155	12538RB/SS/Plt/Sc/Br	12538RB/SS/Plt/Sc	12538RB/SS/Plt/Fc
140 x 38 x 13	Roller Bearing	90 kgs	100 X 100	76 X 76	180	14038RB/SS/Plt/Sc/Br	14038RB/SS/Plt/Sc	14038RB/SS/Plt/Fc
160 x 40 x 13	Roller Bearing	100 kgs	125 X 100	100 X 75	200	16040RB/SS/Plt/Sc/Br	16040RB/SS/Plt/Sc	16040RB/SS/Plt/Fc
180 x 50 x 13	Roller Bearing	120 kgs	125 X 100	100 X 75	220	18050RB/SS/Plt/Sc/Br	18050RB/SS/Plt/Sc	18050RB/SS/Plt/Fc
200 x 50 x 13	Roller Bearing	150 kgs	125 X 100	100 X 75	240	20050RB/SS/Plt/Sc/Br	20050RB/SS/Plt/Sc	20050RB/SS/Plt/Fc

Natural Rubber wheels (Nylon Insert) with Stainless Steel 304 quality Castors (SOLID SS PIN/STUD TYPE CASTORS)

- ➔ Suited for Kota/ Tiled floors for inter departmental transfers/ packing dept/ passage ways/ non sterile production areas
- ➔ Color Availability: Light Grey
- ➔ Loading Capacities mentioned above as considering "Safe Working Loads"
- ➔ SOLID SS Pin/ Stud sizes available: 18 x 50, 22 x 50, 25 x 50, 30 x 50, 32 x 50, 32 x 70, 35 x 70

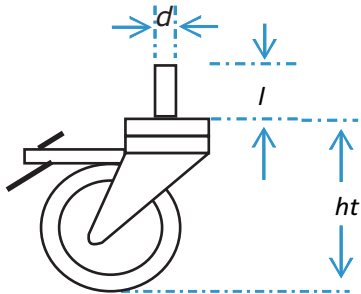




All sizes mentioned are in "mm" (millimeters)
We can manufacture Castors as per your Dimensional needs & Mounting specifications

SINGLE WHEEL CASTOR

Wheel Size OD x W x ID	Bearing	Load per Wheel / Castor	Pin Size <i>d</i> x <i>l</i>	Height <i>ht</i>	Swivel Castor with Brake	Swivel Castor	Fixed Castor
80 x 30 x 10	Roller Bearing	30 kgs	22 X 50	110	8030RB/SS/P22/Sc/Br	8030RB/SS/P22/Sc	8030RB/SS/P22/Fc
100 x 30 x 10	Roller Bearing	50 kgs	22 x 50	135	10030RB/SS/P22/Sc/Br	10030RB/SS/P22/Sc	10030RB/SS/P22/Fc
125 x 38 x 13	Roller Bearing	60 kgs	22 x 50	155	12538RB/SS/P22/Sc/Br	12538RB/SS/P22/Sc	12538RB/SS/P22/Fc
140 x 38 x 13	Roller Bearing	90 kgs	22/32 x 50	180	14038RB/SS/P22/Sc/Br	14038RB/SS/P22/Sc	14038RB/SS/P22/Fc
160 x 40 x 13	Roller Bearing	100 kgs	22/32 x 50	220	16040RB/SS/P32/Sc/Br	16040RB/SS/P32/Sc	16040RB/SS/P32/Fc
180 x 50 x 13	Roller Bearing	120 kgs	32 x 50	220	18050RB/SS/P32/Sc/Br	18050RB/SS/P32/Sc	18050RB/SS/P32/Fc
200 x 50 x 13	Roller Bearing	150 kgs	32 x 50	240	20050RB/SS/P32/Sc/Br	20050RB/SS/P32/Sc	20050RB/SS/P32/Fc

Natural Rubber wheels (Nylon Insert) with Stainless Steel 304 quality Castors (SS THREADED STEM TYPE CASTORS)

- ➔ Suited for Kota/ Tiled floors for inter departmental transfers/ packing dept/ passage ways/ non sterile production areas
- ➔ Color Availability: Light Grey
- ➔ Loading Capacities mentioned above as considering "Safe Working Loads"
- ➔ Threaded stem sizes available: M10 x 50, M12 x 50, M16 x 50, M20 x 50, M24 x 50, M27 x 50 (Length according to your requirement)

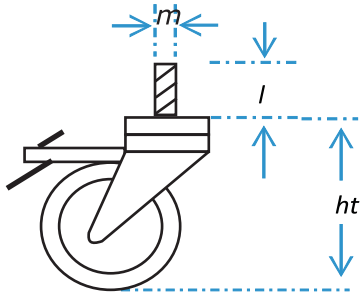


All sizes mentioned are in "mm" (millimeters)
We can manufacture Castors as per your Dimensional needs & Mounting specifications

SINGLE WHEEL CASTOR

Wheel Size OD x W x ID	Bearing	Load per Wheel / Castor	Pin Size <i>m x l</i>	Height <i>ht</i>	Swivel Castor with Brake	Swivel Castor	Fixed Castor
80 x 30 x 10	Roller Bearing	30 kgs	M10 x 50	110	8030RB/SS/M10/Sc/Br	8030RB/SS/M10/Sc	8030RB/SS/M10/Fc
100 x 30 x 10	Roller Bearing	50 kgs	M10 x 50	135	10030RB/SS/M10/Sc/Br	10030RB/SS/M10/Sc	10030RB/SS/M10/Fc
125 x 38 x 13	Roller Bearing	60 kgs	M12 x 50	155	12538RB/SS/M12/Sc/Br	12538RB/SS/M12/Sc	12538RB/SS/M12/Fc
140 x 38 x 13	Roller Bearing	90 kgs	M12 x 50	180	14038RB/SS/M12/Sc/Br	14038RB/SS/M12/Sc	14038RB/SS/M12/Fc
160 x 40 x 13	Roller Bearing	100 kgs	M16 x 50	200	16040RB/SS/M16/Sc/Br	16040RB/SS/M16/Sc	16040RB/SS/M16/Fc
180 x 50 x 13	Roller Bearing	120 kgs	M20 x 50	220	18050RB/SS/M20/Sc/Br	18050RB/SS/M20/Sc	18050RB/SS/M20/Fc
200 x 50 x 13	Roller Bearing	150 kgs	M20 x 50	240	20050RB/SS/M20/Sc/Br	20050RB/SS/M20/Sc	20050RB/SS/M20/Fc

SOLID Autoclave Able SYNOFLEX wheel with Stainless Steel 316 quality Castors (PLATE TYPE CASTORS)

- ➔ Product tested under recommended loading with Constant Steam Temperature if 135 degrees centigrade.
- ➔ Color Availability: off White.
- ➔ Loading Capacities mentioned above as considering "Safe Working Loads".
- ➔ All metallic parts used in this product are of Stainless Steel 316 Quality.
- ➔ Brake Type Castors are not recommended for this product as the Brake Strip if of "SPRING STEEL" which is corrosive due to Steam Temperature.

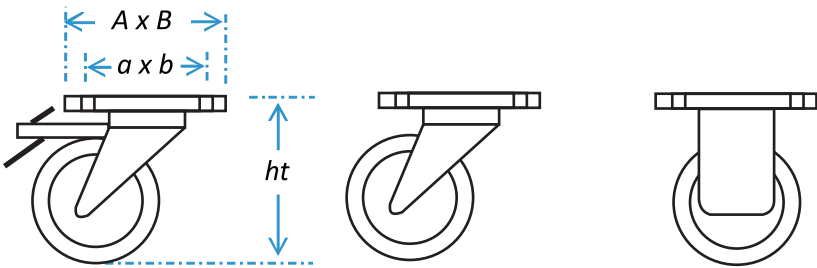

All sizes mentioned are in “mm” (millimeters)
We can manufacture Castors as per your Dimensional needs & Mounting specifications

SINGLE WHEEL CASTOR

Wheel Size OD x W x ID	Bearing	Load per Wheel / Castor	Plate Size A X B	Hole Dist a x b	Height ht	Swivel Castor	Fixed Castor
50 x 22 x 6	Bush	15 kgs	75 x 55	50 x 30	85	5022Sy/SS/Plt/Sc	5022Sy/SS/Plt/Fc
75 x 32 x 10	Bush	35 kgs	75 x 75	60 x 60	105	7532Sy/SS/Plt/Sc	7532Sy/SS/Plt/Fc
100 x 32 x 10	Bush	55 kgs	75 x 75	60 x 60	135	10032Sy/SS/Plt/Sc	10032Sy/SS/Plt/Fc
100 x 50 x 13	Roller Bearing	100 kgs	100 x 100	76 x 76	135	10050Sy/SS/Plt/Sc	10050Sy/SS/Plt/Fc
125 x 35 x 10	Roller Bearing	75 kgs	100 x 100	76 x 76	155	12535Sy/SS/Plt/Sc	12535Sy/SS/Plt/Fc
125 x 50 x 13	Roller Bearing	125 kgs	100 x 100	76 x 76	155	12550Sy/SS/Plt/Sc	12550Sy/SS/Plt/Fc
150 x 50 x 13	Roller Bearing	150 kgs	125 x 100	100 x 75	190	15050Sy/SS/Plt/Sc	15050Sy/SS/Plt/Fc
200 x 50 x 13	Roller Bearing	175 kgs	125 x 100	100 x 75	240	20050Sy/SS/Plt/Sc	20050Sy/SS/Plt/Fc

TWIN WHEEL CASTOR

125 x 50 x 13	Roller Bearing	250 kgs	125 x 100	100 x 75	175	12550Sy/SS/TW/Plt/Sc	12550Sy/SS/TW/Plt/Fc
150 x 50 x 13	Roller Bearing	300 kgs	125 x 100	100 x 75	200	15050Sy/SS/TW/Plt/Sc	15050Sy/SS/TW/Plt/Fc
200 x 50 x 13	Roller Bearing	375 kgs	125 x 100	100 x 75	250	20050Sy/SS/TW/Plt/Sc	20050Sy/SS/TW/Plt/Fc

SOLID Stainless Steel wheel with Stainless Steel 304 quality Castors (PLATE TYPE CASTORS)

- ➔ Brake Type Castors are not recommended for this product
- ➔ Product recommended for Tray Dryers
- ➔ Loading Capacities mentioned above as considering "Safe Working Loads"

SINGLE WHEEL CASTOR

Wheel Size OD x W x ID	Bearing	Load per Wheel / Castor	Plate Size A X B	Hole Dist a x b	Height ht	Swivel Castor	Fixed Castor
50 x 22 x 6	Bush	20 kgs	75 x 55	50 x 30	85	5022SS/SS/Plt/Sc	5022SS/SS/Plt/Fc
75 x 32 x 10	Bush	40 kgs	75 x 75	60 x 60	105	7532SS/SS/Plt/Sc	7532SS/SS/Plt/Fc
100 x 32 x 10	Bush	75 kgs	75 x 75	60 x 60	135	10032SS/SS/Plt/Sc	10032SS/SS/Plt/Fc
100 x 50 x 13	Bush	120 kgs	100 x 100	76 x 76	135	10050SS/SS/Plt/Sc	10050SS/SS/Plt/Fc
125 x 35 x 13	Bush	120 kgs	100 x 100	76 x 76	155	12535SS/SS/Plt/Sc	12535SS/SS/Plt/Fc
125 x 50 x 13	Bush	175 kgs	100 x 100	76 x 76	155	12550SS/SS/Plt/Sc	12550SS/SS/Plt/Fc



All sizes mentioned are in "mm" (millimeters)
We can manufacture Castors as per your Dimensional needs & Mounting specifications

Special Medical Series castor with thermoplastic Rubber Wheel (SOLID PIN AND THREADED STEM TYPE CASTORS)

- ➔ Wheel Material : Dark Grey TPR
- ➔ Castor Material : Nylon Body (Single construction)
- ➔ Top Fixture : SOLID Pin & Threaded stem

Wheel Size Dia x Width	Bearing	Top Fixture Pin Dia	Recommended Load per Castor	Series
75 x 30	Ball Bearing	M12 x 25	30 kgs	MED/7530TPR/M12/Ny/Sc+Br
75 x 30	Ball Bearing	M12 x 25	30 kgs	MED/7530TPR/M12/Ny/Sc
100 x 30	Ball Bearing	M12 x 25	40 kgs	MED/10030TPR/M12/Ny/Sc+Br
100 x 30	Ball Bearing	M12 x 25	40 kgs	MED/10030TPR/M12/Ny/Sc
125 x 30	Ball Bearing	M12 x 25	60 kgs	MED/12530TPR/M12/Ny/Sc+Br
125 x 30	Ball Bearing	M12 x 25	60 kgs	MED/12530TPR/M12/Ny/Sc
125 x 30	Ball Bearing	P28 x 40	60 kgs	MED/12530TPR/P28Ny/Sc+Br
125 x 30	Ball Bearing	P28 x 40	60 kgs	MED/12530TPR/P28/Ny/Sc




All sizes mentioned are in "mm" (millimeters)
Sc+Br = SWIVEL + BRAKE

Twin Wheel Turn Table Assembly

- ➔ The above product is for a Pull Type Application, to be fitted with a “T” shape handle
- ➔ The product should be fitted under the base of the equipment in the front from where the equipment is intended to be steered, with 2 Nos FIXED CASTORS at the rear for balance & easy/ efficient manoeuvrability

Wheel Size Dia x Width	Bearing	Recommended Load per Turn Table	Plate Size A X B	Hole Dist a x b	Height
125 x 50	Ball Bearing	250 kgs	125 x 100	100 x 75	175
150 x 50	Ball Bearing	300 kgs	125 x 100	100 x 75	200
200 x 50	Ball Bearing	325 kgs	125 x 100	100 x 75	250
250 x 60	Ball Bearing	375 kgs	150 x 125	125 x 100	305

All sizes mentioned are in “mm” (millimeters)
We can manufacture Castors as per your Dimensional needs & Mounting specifications

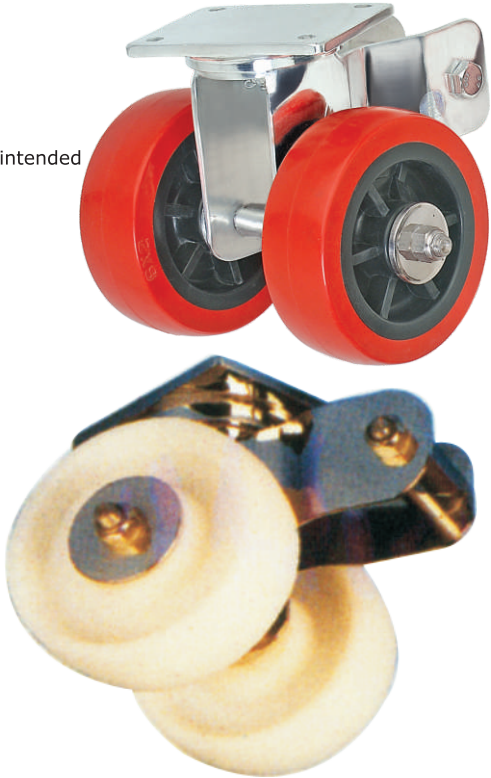

Polyurethane load wheels (rollers) for Pallet Trucks (with Aluminum and cast iron inserts)

- ➔ Loading Capacities mentioned above as considering “Safe Working Loads”

Roller Size Dia x Width	Polyurethane hardness	insert	Ball Bearing	Series
70 x 70	95 Shore A	Aluminium or CI	6004ZZ	LW/7070/PU/AI
82 x 70	95 Shore A	Aluminium or CI	6205ZZ or 6304ZZ	LW/8270/PU/AI
82 x 80	95 Shore A	Aluminium or CI	6205ZZ or 6304ZZ	LW/8280/PU/AI
82 x 90	95 Shore A	Aluminium or CI	6205ZZ or 6304ZZ	LW/8290/PU/AI
82 x 95	95 Shore A	Aluminium or CI	6205ZZ or 6304ZZ	LW/8295/PU/AI
82 x 100	95 Shore A	Aluminium or CI	6205ZZ or 6304ZZ	LW/82100/PU/AI
82 x 110	95 Shore A	Aluminium or CI	6205ZZ or 6304ZZ	LW/82110/PU/AI



Polyurethane rear wheel for the above rollers in standard sizes

Roller Size Dia x Width	Polyurethane hardness	insert	Ball Bearing	Series
150 x 45	95 Shore A	Aluminium or CI	6205ZZ or 6304ZZ	15045/PU/AI/BB
200 x 45	95 Shore A	Aluminium or CI	6205ZZ or 6304ZZ	20045/PU/AI/BB

All sizes mentioned are in “mm” (millimeters)
We can manufacture Castors as per your Dimensional needs & Mounting specifications



Anti Vibration Mounts / Adjusting Glides / Leveling Feet in stainless steel & Carbon Steel (Chrome Plated) with Polyurethane base

- ➔ PU Base with Anti Static Properties can be manufactured on request
- ➔ Loading Capacities mentioned above as considering "Safe Working Loads"
- ➔ Color Availability: PU Base in Red OR Dark Blue Color

Base Dia	Base MOC	SS Stud Thread	SS Stud Length	Recommended Loading (kgs) Per Mount	Series
80	PU with SS 304	M16	125	150	LM-PU-SS/080/M16125
100	PU with SS 304	M20	125	200	LM-PU-SS/100/M20125
125	PU with SS 304	M20	125	300	LM-PU-SS/125/M20125
140	PU with SS 304	M24	125	400	LM-PU-SS/140/M24125

All sizes mentioned are in "mm" (millimeters)
We can manufacture Castors as per your Dimensional needs & Mounting specifications



Anti Vibration Mounts / Adjusting Glides / Leveling Feet in stainless steel & Carbon Steel (Zinc Plated) with Polyurethane base


- ➔ Levelling Mounts will be provided with an Anti Static PU Floor Contact OR PU Floor Contact, bonded to the Stainless Steel Round Base Plate.
- ➔ Loading Capacities mentioned above as considering "Safe Working Loads"
- ➔ Each Levelling Mount will be provided with SS Nuts & Washers.

Base Dia	Base MOC	SS Stud Thread	SS Stud Length	Recommended Loading (kgs) Per Mount	Series
50	PU with SS 304	M10	50	40	LM/050/M10/050/SS
80	PU with SS 304	M12	125	75	LM/080/M12/125/SS
80	PU with SS 304	M16	125	150	LM/080/M16/125/SS
80	PU with SS 304	M20	125	200	LM/080/M20/125/SS
100	PU with SS 304	M16	125	240	LM/100/M16/125/SS
100	PU with SS 304	M20	125	280	LM/100/M20/125/SS
120	PU with SS 304	M20	125	300	LM/120/M20/125/SS
120	PU with SS 304	M24	125	360	LM/120/M24/125/SS
150	PU with SS 304	M24	125	390	LM/150/M24/125/SS
150	PU with SS 304	M27	125	480	LM/150/M27/125/SS
180	PU with SS 304	M27	125	550	LM/180/M27/125/SS



All sizes mentioned are in "mm" (millimeters)
We can manufacture Castors as per your Dimensional needs & Mounting specifications

NOTES

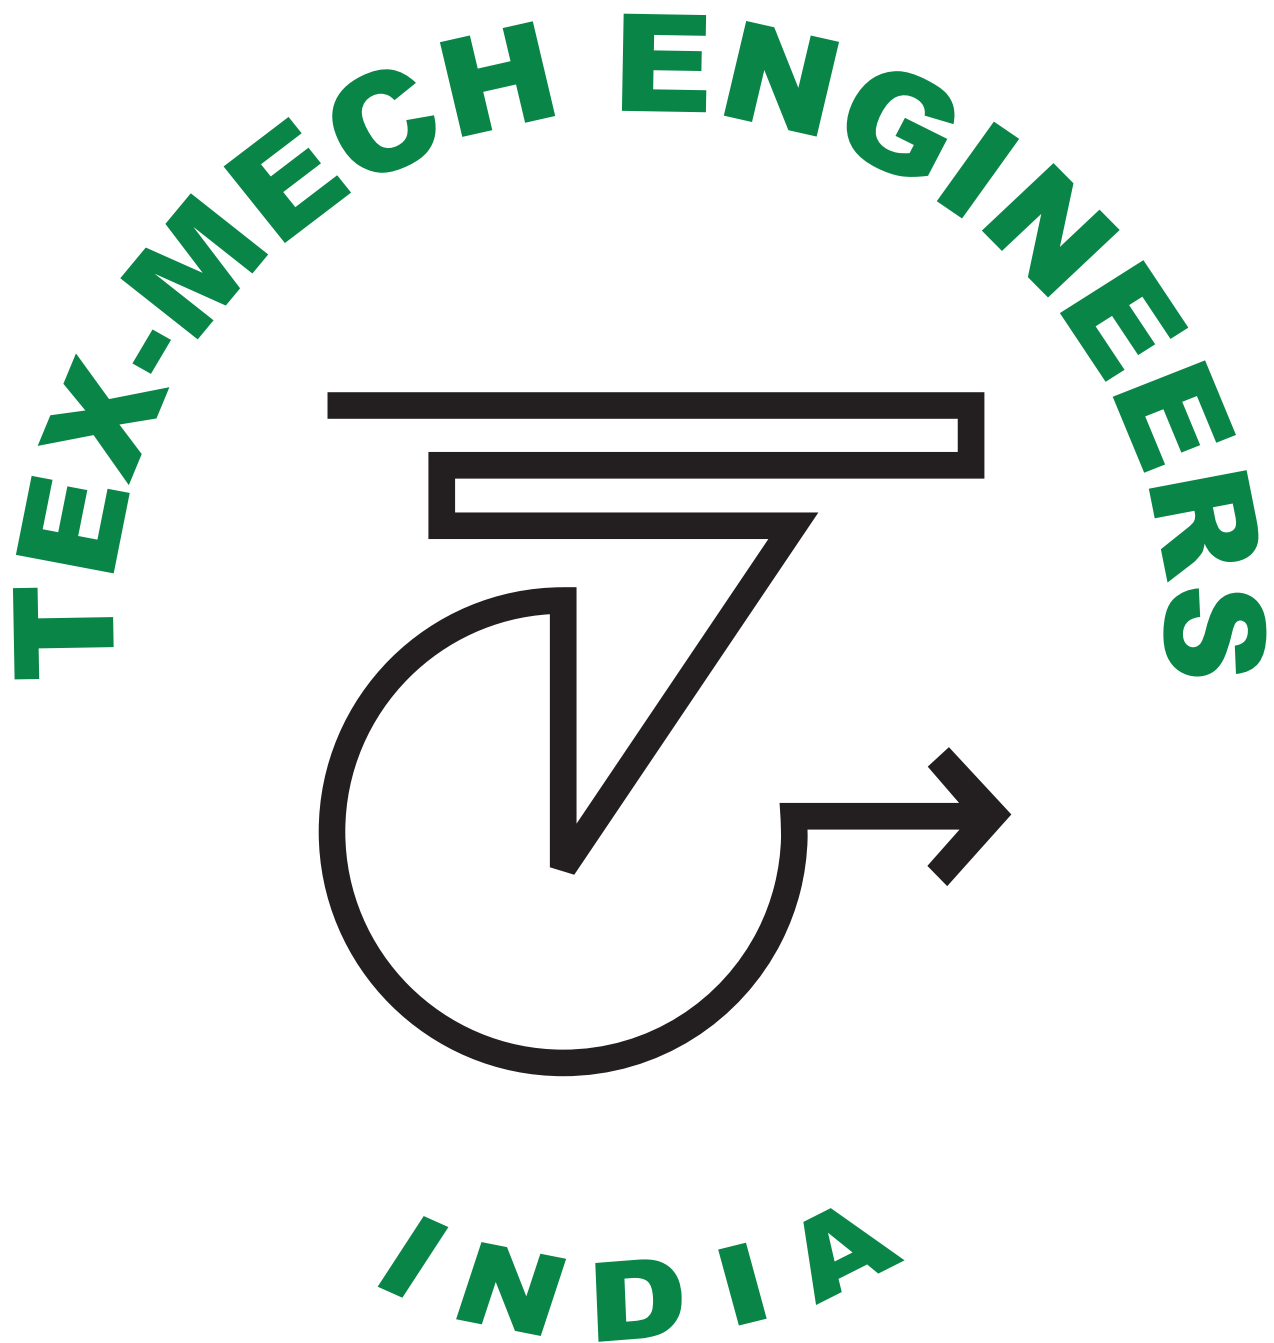

AN ISO 9001:2008 Certified Company

Mobility Solutions

SINCE 1970

Food Processing
(Canned foods, Meats, Chocolates, Candies, Pre Processed Food)

Pharmaceutical
(Bulk Drugs, Formulations, Allopathic medicines,
Ayurvedic Medicines, Machinery & Clean Room Equipment Manufacturers)

Cosmetics/ Beauty Care
(Creams, Lotions, Pastes, Powders, Talcs, Perfumes)

Filtration Equipments
(Pharmaceuticals, Cosmetics, Pigments)


Chemicals
(Pigments, Dyes, Powders, Acids, Paints),

Electronics
(Assembly Areas, Workshops, Clean Room Assembly Points, Testing labs)

Material Handling
(Trolleys, Pallet Trucks, Motorized Trucks, Cranes, Scaffolding)

Automobile
(Workshops, Assembly Points/ Areas)

www.texmech.com



TEX MECH ENGINEERS
Mobility Solutions

302, Tapo Commercial Center, 3rd Floor, Opp Movie
Star Cinema, Ram Mandir Road, Goregaon West,
Mumbai 400104, INDIA

Tel: 91-22-66943497
Telefax: 91-22-66943496
Email: info@texmech.com
Web : www.texmech.com

Images used are for representation purpose only
Due to continuous improvement, specification are subject to change without prior notice

